

FLOOR MOUNTED JIB CRANE

CAPACITIES UP TO 2,100 LBS.

The Unified enclosed track jib crane provides a versatile and cost effective solution to your crane needs where adequate headroom and structural support does not exist.

Use as a supplement to a regular traveling crane or monorail track, or for use in bays and along the walls or side of shops.

BENEFITS & FEATURES

CAPACITIES

50 lbs. to 2,100 lbs.

Standard boom lengths up to 20 ft.

Standard under-boom heights of 10 ft. and 12 ft.

SPECIFICATIONS

Up to 220 Degrees Rotation.

End stops at both ends of the boom to limit trolley travel.


Mast fabricated from structural steel square tubing with wall

thickness sized to minimize deflection.

Boom - Extruded high grade 6005-T5 Aluminum providing a


clean, smooth and quiet operation.

Optional adjustable rotation stops.

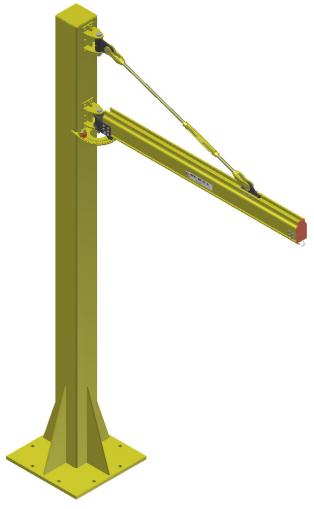



ETA FLOOR MOUNTED JIB CRANE

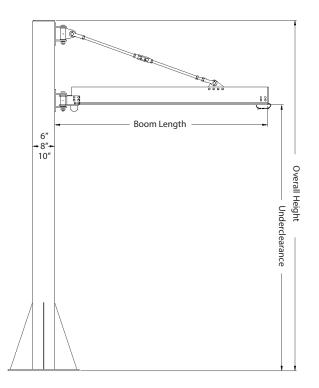

Optional Stops:

| Part # | Description |
|--------|---|
| 98535 | 6" Jib Column Welded Index Stop Assembly for ETA-4 |
| 98536 | 6" Jib Column Bolted Index Stop Assembly for ETA-4 |
| 98540 | 8" Jib Column Welded Index Stop Assembly for ETA-5 |
| 98541 | 8" Jib Column Bolted Index Stop Assembly for ETA-5 |
| 98545 | 10" Jib Column Welded Index Stop Assembly for ETA-8 |
| 98546 | 10" Jib Column Bolted Index Stop Assembly for ETA-8 |

Base Plate:

| Jib Size | Dimensions | | | |
|----------|-------------------|--|--|--|
| ETA-4 | 2'-3" L x 2'-3" W | | | |
| ETA-5 | 2'-3" L x 2'-3" W | | | |
| ETA-8 | 2'-8" L x 2'-8" W | | | |

| | | D | l los el en | 0 | Datad | Caluman | Factions |
|------------|--------|----------------|--------------------|-------------------|----------------------|-----------------|------------------|
| ETA Series | Part # | Boom Length | Under Clearance | Overall Height | Rated Load | Column Width | Footing Depth |
| | 98761 | 6'-0" | 12'-0" | 14' - 8" | 650 Lbs. | 6" | 6" |
| | 98763 | 7 - 0" | 12'-0" | 14' - 8" | 600 Lbs. | 6" | 6" |
| | 98765 | 8'-0" | 12'-0" | 14' - 8" | 500 Lbs. | 6" | 6" |
| | 98767 | 9'-0" | 12'-0" | 15' - 2" | 450 Lbs. | 6" | 6" |
| | 98769 | 10' - 0" | 12'-0" | 15' - 2" | 400 Lbs. | 6" | 6" |
| | 98771 | 11'-0" | 12'-0" | 15' - 2" | 350 Lbs. | 6" | 6" |
| | 98773 | 12'-0" | 12'-0" | 15' - 8" | 300 Lbs. | 6" | 6" |
| ETA-4 | 98775 | 13'-0" | 12'-0" | 15' - 8" | 300 Lbs. | 6" | 6" |
| | 98777 | 14' - 0" | 12'-0" | 15 - 8" | 275 Lbs. | 6" | 6" |
| | 98779 | 15' - 0" | 12'-0" | 16' - 2" | 250 Lbs. | 6" | 6" |
| | 98781 | 16' - 0" | 12' - 0" | 16 - 2" | 200 Lbs. | 6" | 6" |
| | 98783 | 17' - 0" | 12'-0" | 16' - 2" | 175 Lbs. | 6" | 6" |
| | 98785 | 18 - 0" | 12'-0" | 16'-8" | 150 Lbs. | 6" | 6" |
| | 98787 | 19' - 0" | 12'-0" | 16' - 8" | 150 Lbs. | 6" | 6" |
| | 98789 | 20' - 0" | 12' - 0" | 16' - 8" | 125 Lbs. | 6" | 6" |
| | 98661 | 6'-0" | 12'-0" | 14' - 8" | 1100 Lbs. | 8" | 6" |
| | 98663 | 7 - 0" | 12'-0" | 14' - 8" | 1100 Lbs. | 8″ | 6" |
| | 98665 | 8'-0" | 12'-0" | 14' - 8" | 1100 Lbs. | 8″ | 6" |
| | 98667 | 9'-0" | 12'-0" | 15' - 2" | 1000 Lbs. | 8″ | 6" |
| | 98669 | 10' - 0" | 12'-0" | 15' - 2" | 900 Lbs. | 8″ | 6" |
| | 98671 | 11'-0" | 12'-0" | 15' - 2" | 900 Lbs. | 8" | 6" |
| ETA-5 | 98673 | 12'-0" | 12'-0" | 15' - 8" | 700 Lbs. | 8″ | 6" |
| | 98675 | 13'-0" | 12'-0" | 15' - 8" | 600 Lbs. | 8″ | 6" |
| | 98677 | 14' - 0" | 12'-0" | 15' - 8" | 500 Lbs. | 8" | 6" |
| | 98679 | 15' - 0" | 12'-0" | 16' - 2" | 500 Lbs. | 8" | 6" |
| | 98681 | 16' - 0" | 12'-0" | 16' - 2" | 400 Lbs. | 8" | 6" |
| | 98683 | 17' - 0" | 12'-0" | 16' - 2" | 350 Lbs. | 8" | 6" |
| | 98685 | 18 - 0" | 12'-0" | 16' - 8" | 300 Lbs. | 8" | 6" |
| | 98687 | 19' - 0" | 12'-0" | 16' - 8" | 250 Lbs. | 8" | 6" |
| | 98689 | 20' - 0" | 12'-0" | 16' - 8" | 200 Lbs. | 8" | 6" |
| | 98562 | 6'-0" | 12'-0" | 14' - 8" | 2100 Lbs. | 10" | 9″ |
| | 98564 | 7'-0" | 12'-0" | 14' - 8" | 2000 Lbs. | 10" | 9" |
| | 98567 | 8'-0" | 12'-0" | 14' - 8" | 1800 Lbs. | 10" | 9″ |
| ETA-8 | 98569 | 9'-0" | 12'-0" | 15 - 2" | 1700 Lbs. | 10" | 9″ |
| | 98571 | 10' - 0" | 12'-0" | 15' - 2" | 1500 Lbs. | 10" | 9″ |
| | 98573 | 11'-0" | 12'-0" | 16' - 0" | 1500 Lbs. | 10" | 9″ |
| | 98575 | 12'-0" | 12'-0" | 16' - 0" | 1500 Lbs. | 10" | 9″ |
| | 98577 | 13'-0" | 12'-0" | 16' - 8" | 1400 Lbs. | 10" | 9" |
| | 98579 | 14' - 0" | 12'-0" | 16' - 8" | 1300 Lbs. | 10" | 9" |
| | 98581 | 15'-0" | 12'-0" | 17' - 4" | 1200 Lbs. | 10" | 9" |
| | 98583 | 16' - 0" | 12' - 0" | 17' - 4" | 1200 Lbs. | 10" | 9" |
| | 98585 | 17'-0" | 12'-0" | 18' - 0" | 1200 Lbs. | 10" | 9" |
| | 98587 | 18'-0" | 12'-0" | 18'-0" | 900 Lbs. | 10" | 9" |
| | 98589 | 19'-0" | 12 - 0" | 18' - 8" | 900 Lbs. | 10" | 9" |
| | 98589 | 20' - 0" | 12 - 0" | 18' - 8" | 900 Lbs. 850 Lbs. | 10" | 9" |
| | ועכטע | 20 - 0" | 12 - 0" | 18 - 8 | 850 LDS. | 10" | 9" |

^{*}For other underclearances, please consult the factory.



Phone: 517.546.3220 · Fax: 517-546-0696

www.unified-ind.com